


MINI-LUX

3860



Ball valve, F/F threaded, sandblasted and chrome plated, operating with screwdriver.

Technical specifications

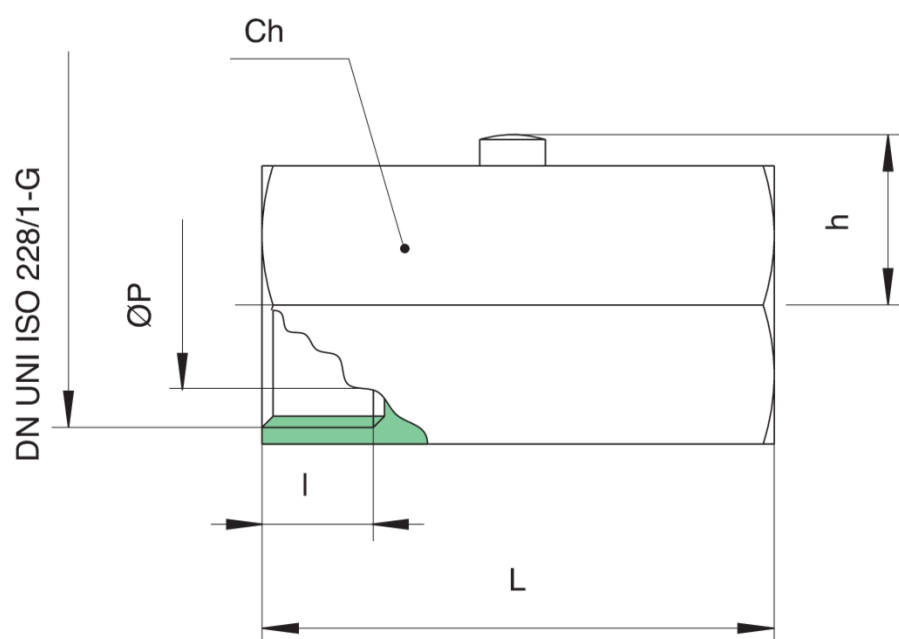

SIZE	DN	BOX	MASTER BOX	CODE	ØP	L	I	H	CH	KV	PN	KG
1/4"	8	50	300	3860020000	8	41	10	13,8	21	4,3	10	0,09
3/8"	10	50	300	3860030000	8	41	10	13,8	21	2,7	10	0,08
1/2"	15	40	240	3860040000	10	46	11	15,8	25	5,4	10	0,12

Temperature range: -20°C +90°C.

Applications



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE