



## FULL-SFER

# 2310

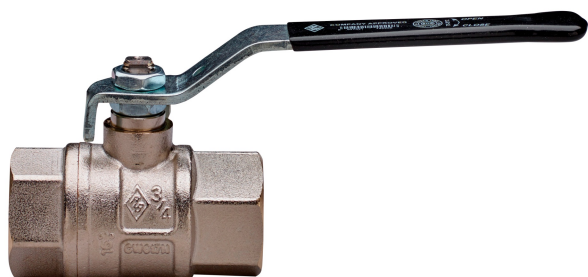

Full bore ball valve, F/F threaded, with steel handle and rinsing/compensation hole.

## Technical specifications

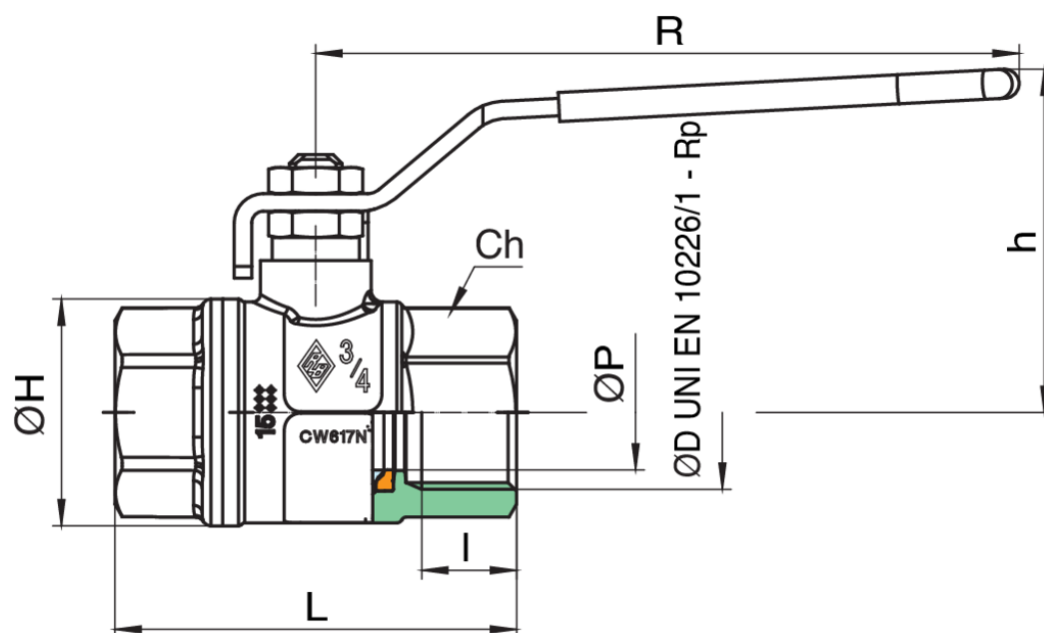

| SIZE   | DN  | BOX | MASTER BOX | CODE       | ØP  | I    | L     | ØH  | CH  | R   | H    | KV   | PN | KG    |
|--------|-----|-----|------------|------------|-----|------|-------|-----|-----|-----|------|------|----|-------|
| 1/4"   | 8   | 20  | 80         | 1710020000 | 10  | 11   | 51,5  | 23  | 20  | 95  | 43   | 5,4  | 64 | 0,15  |
| 3/8"   | 10  | 20  | 80         | 1710030000 | 10  | 11,4 | 51,5  | 23  | 20  | 95  | 43   | 6    | 64 | 0,14  |
| 1/2"   | 15  | 20  | 80         | 2310040000 | 15  | 15   | 62    | 33  | 27  | 96  | 46,5 | 16,3 | 64 | 0,22  |
| 3/4"   | 20  | 10  | 40         | 2310050000 | 20  | 16,3 | 69    | 39  | 32  | 121 | 59   | 29,5 | 64 | 0,34  |
| 1"     | 25  | 10  | 20         | 2310060000 | 25  | 19,1 | 83    | 49  | 38  | 121 | 63   | 43   | 64 | 0,53  |
| 1"1/4  | 32  | 6   | 12         | 2310070000 | 32  | 21,4 | 96    | 59  | 48  | 151 | 76   | 89   | 50 | 0,82  |
| 1"1/2  | 40  | 4   | 8          | 2310080000 | 40  | 21,4 | 108   | 73  | 54  | 151 | 82,5 | 230  | 40 | 1,21  |
| 2"     | 50  | 2   | 4          | 2310100000 | 50  | 25,7 | 127,5 | 87  | 67  | 160 | 95,5 | 265  | 40 | 1,90  |
| 2"1/2* | 65  | 2   | 4          | 1710120000 | 65  | 30,2 | 152   | 111 | 90  | 206 | 123  | 540  | 25 | 3,73  |
| 3"     | 80  | 0   | 4          | 1710140000 | 80  | 33,3 | 177   | 136 | 105 | 206 | 133  | 873  | 25 | 5,95  |
| 4"     | 100 | 0   | 2          | 1710180000 | 100 | 39,3 | 214   | 166 | 130 | 261 | 166  | 1390 | 25 | 10,57 |

Temperature range: -20°C +160°C.

\*Art. [1710](#)

## Applications



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE