


UNI-SFER

1510



Valvola a sfera a passaggio totale, filettatura F/F, con leva in acciaio.

Specifiche tecniche

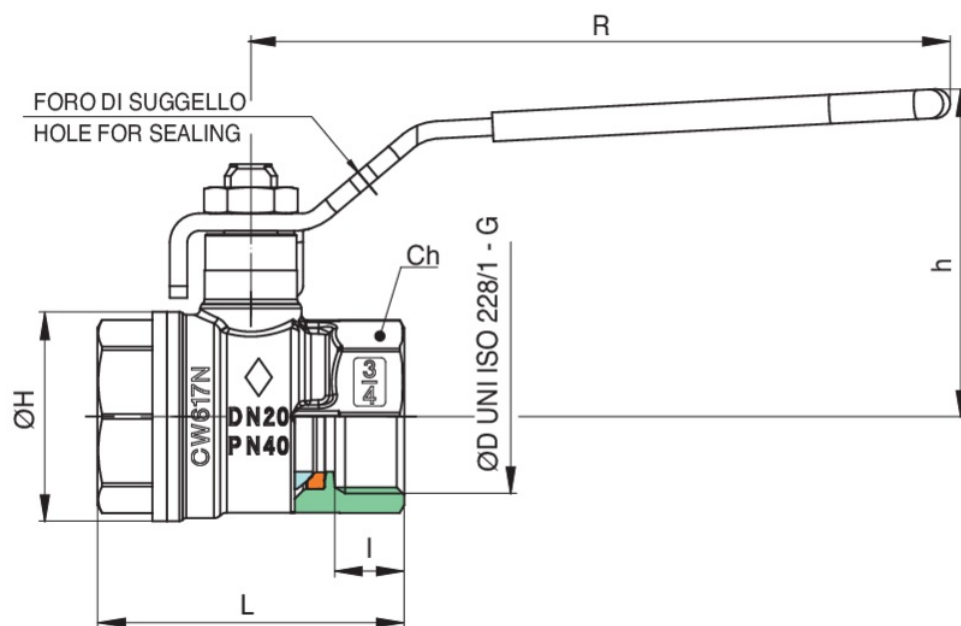

MISURA	DN	BOX	MASTER BOX	CODICE	I	L	ØH	CH	R	H	KV	PN	KG
1/4"	8	20	80	1710020000	11	51,5	23	20	95	43	5,4	64	0,15
3/8"	10	20	80	1710030000	11,4	51,5	23	20	95	43	6	64	0,14
1/2"	15	20	80	1510040000	12	47,5	30	25	96	45	15,7	50	0,16
3/4"	20	10	40	1510050000	12	53	36	31	121	56,5	28	40	0,26
1"	25	10	20	1510060000	14,5	65,5	43,5	38	121	59	41,5	40	0,39
1"1/4	32	6	12	1510070000	16	76,5	53	48	151	72,5	84,6	40	0,67
1"1/2	40	4	8	1510080000	18	89	65	54	151	78,5	218,5	40	0,96
2"	50	2	4	1510100000	19	103	80	67	160	91,5	251,5	40	1,58
2"1/2	65	2	4	1510120000	24	129,5	104	83	206	116,5	513	16	2,75
3"	80	-	4	1510140000	27	151	126	98	206	127	829,4	16	4,30
4"	100	-	2	1510180000	32	185	154,5	125	206	141	1320,5	16	7,74

Limiti di temperatura: -20°C +160°C.

*Art. [1710](#)

Applicazioni



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE