



## EURO-SFER

### 1780

Valvola a sfera a passaggio totale, filettatura F/F, con cappuccio piombabile.

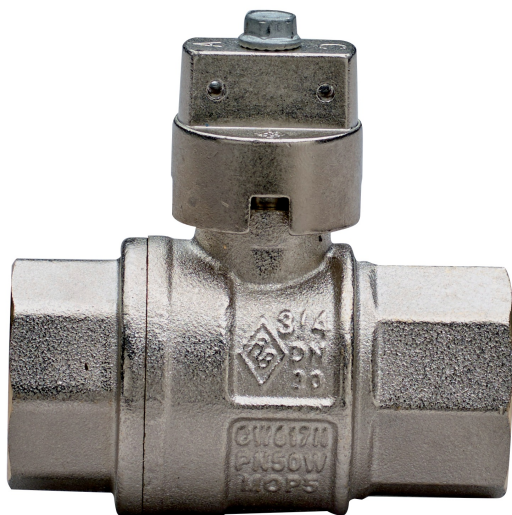

## Specifiche tecniche

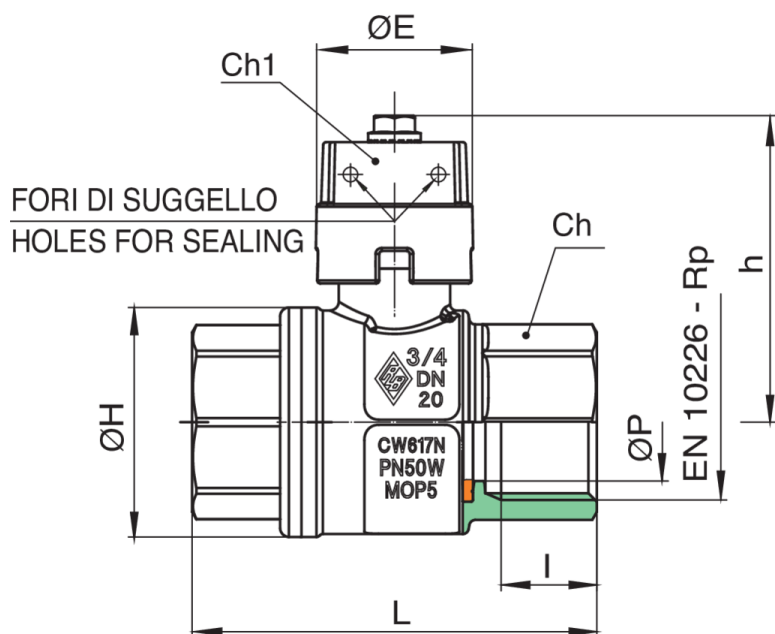

| MISURA | DN  | BOX | MASTER BOX | CODICE     | ØP  | I    | L     | H    | CH  | CH1 | ØH  | ØE   | KV   | PN | KG    |
|--------|-----|-----|------------|------------|-----|------|-------|------|-----|-----|-----|------|------|----|-------|
| 1/2"   | 15  | 20  | 80         | 1780040000 | 15  | 15   | 62    | 42,5 | 25  | 12  | 33  | 23,5 | 16,3 | 64 | 0,20  |
| 3/4"   | 20  | 10  | 40         | 1780050000 | 20  | 16,3 | 69    | 52   | 31  | 12  | 39  | 27   | 29,5 | 50 | 0,33  |
| 1"     | 25  | 10  | 20         | 1780060000 | 25  | 19,1 | 83    | 56   | 38  | 12  | 49  | 27   | 43   | 50 | 0,51  |
| 1"1/4  | 32  | 6   | 12         | 1780070000 | 32  | 21,4 | 96    | 66,5 | 48  | 12  | 59  | 32   | 89   | 50 | 0,83  |
| 1"1/2  | 40  | 4   | 8          | 1780080000 | 40  | 21,4 | 108   | 72,5 | 54  | 12  | 73  | 32   | 230  | 40 | 1,23  |
| 2"     | 50  | 2   | 4          | 1780100000 | 50  | 25,7 | 127,5 | 85   | 67  | 18  | 86  | 40   | 265  | 40 | 2,00  |
| 2"1/2  | 65  | 2   | 4          | 1780120000 | 65  | 30,2 | 152   | 104  | 90  | 18  | 111 | 50   | 540  | 25 | 3,58  |
| 3"     | 80  | -   | 4          | 1780140000 | 80  | 33,3 | 177   | 115  | 105 | 18  | 136 | 50   | 873  | 25 | 5,79  |
| 4"     | 100 | -   | 2          | 1780180000 | 100 | 39,3 | 214   | 138  | 130 | 23  | 166 | 55   | 1390 | 25 | 10,24 |

Limiti di temperatura: -20°C +160°C.

## Applicazioni



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE